


SILVER

SV150 & SV250




DIMENSIONS

• Silver SV 150

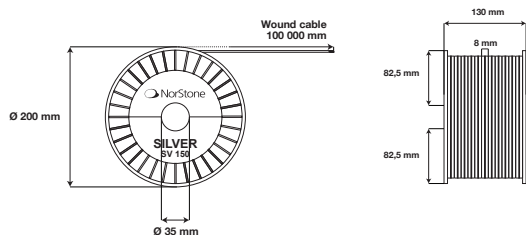

• Silver SV 250

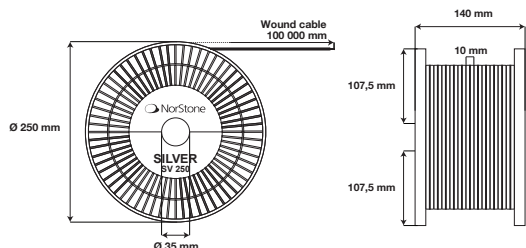

CHARACTERISTIC(S)



Loudspeaker



Amplifier

CABLES LENGTHS

2 x 150m 3760108804043
NORSIL150100

2 x 250m 3760108804111
NORSIL250100

DESCRIPTION

The silver plated copper OFC conductors have a very low resistance per unit. These cables ensure an even better analytic listening. Its structure reduces all the loss to barely measurable levels. With this product you will have the sharpest listening you would be able to have. Every micro information are accurately played to obtain a 3D sound picture, almost palpable, even for the most complex tracks. Reconsider what you were expecting from this cable price range.

DESIGN

Shape : *Square section for - / round section for +*

Finish : *Shiny*

Marking : *Indication on the remaining length*

SHEATH SV150

Structure : *Copper OFC + Silver plated*

Resistance : *0.011 Ω*

Capacitance : *60.000 pF/m*

Section : *2 x 1.5 mm²*

Length : *100m*

CONDITIONING SV150

Quantity / spool : *1*

Type : *spool*

Dimensions (L x H x P) : *200 x 200 x 130 mm*

Gross weight : *4,9 kg*

Net weight : *4,5 kg*

SHEATH SV250

Structure : *Copper OFC + Silver plated*

Resistance : *0.008 Ω*

Capacitance : *61.560 pF/m*

Section : *2 x 2.5 mm²*

Length : *100m*

CONDITIONING SV250

Quantity / spool : *1*

Type : *spool*

Dimensions (L x H x P) : *250 x 250 x 140 mm*

Gross weight : *9,8 kg*

Net weight : *8,8 kg*